

RCCN Wiring Duct Dimensions

ISO9001   RoHS

Dimensions are shown for reference only.
Contact customer service (see page footnote) for specific dimensional needs

Usage : Fixed the bottom duct first and put wires in duct then close the cover cap.

Feature : Composed easily, not peel, smooth match and won't be hurt.

Construction: Composed of bottom duct and cover cap, slot holes in both side.

Material: Hardness Lead-Free PVC UL-94V0

Color: Gray


Standard Length: 2.0M

Mounting Method: Standard Mounting Holes

UL Recognized continuous use temperature: 50°C


% - Suffixed by VD indicating 8 mm slots,
HVD indicating 5 mm slots or
no suffix indicating Solid duct, no slots.

For ALL high duct.

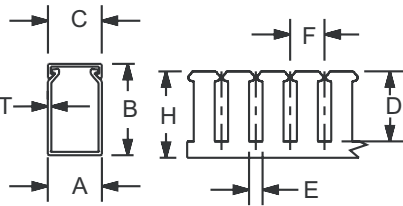


Mounting Hole Dimensions

For 16mm-65mm wide duct.

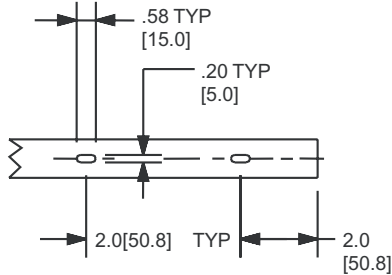

For 75mm-140mm wide duct.

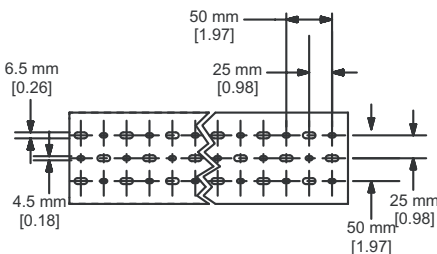

DUCT SIZE (WxH)	A	B	C	D	VD		HVD		H	T	Max.no. wires (14AWG) PCS
					E	F	E	F			
1616	16	16	16	8.5	8	20	5	13	14.5	1.3	8
2020	20	20	20	12.5	8	20	5	13	18.5	1.3	12
1525	15	25	15	15.5	8	20	5	13	23.5	1.4	12
2025	20	25	20	15.5	8	20	5	13	23.5	1.4	20
2525	25	25	25	15.5	8	20	5	13	23.5	1.4	25
2530	25	30	25	20.0	8	20	5	13	28.5	1.4	25
3030	30	30	30	20.0	8	20	5	13	28.5	1.5	25
2233	22	33	22	21.5	8	20	5	13	31.5	1.3	25
*3333	33	33	33	21.5	8	20	5	13	31.5	1.4	25
3535	35	35	35	22.5	8	20	5	13	32.5	1.4	25
2540	25	40	25	28.5	8	20	5	13	38.5	1.4	25
*3340	33	40	33	27.5	8	20	5	13	37.5	1.4	40
4040	40	40	40	28.5	8	20	5	13	38.5	1.4	50
6040	60	40	60	27.5	8	20	5	13	37.8	1.6	100
8040	80	40	80	28.5	8	20	5	13	38.5	2.0	120
*10040	100	40	100	28.5	8	20	5	13	38.5	2.0	130
2545	25	45	25	33.5	8	20	5	13	43.5	1.4	25
3345	33	45	33	33.5	8	20	5	13	43.5	1.2	40
4545	45	45	45	33.5	8	20	5	13	43.5	1.5	60
*6545	65	45	65	38.5	8	20	5	13	43.5	1.6	110
2550	25	50	25	38.5	8	20	5	13	48.5	1.6	25
3050	30	50	30	38.5	8	20	5	13	48.5	1.6	60
3550	35	50	35	38.5	8	20	5	13	48.5	1.6	65
4050	40	50	40	38.5	8	20	5	13	48.5	1.6	70
4550	45	50	45	38.5	8	20	5	13	48.5	1.6	75
*5550	55	50	55	38.5	8	20	5	13	48.5	1.6	80
5050	50	50	50	38.5	8	20	5	13	48.5	1.6	85
6050	60	50	60	38.5	8	20	5	13	48.5	1.6	90
8050	80	50	80	38.5	8	20	5	13	48.5	2.0	180
10050	100	50	100	38.5	8	20	5	13	48.5	2.0	200
2060	20	60	20	47.5	8	20	5	13	57.5	1.7	25
2560	25	60	25	47.5	8	20	5	13	57.5	1.6	40
4060	40	60	40	47.5	8	20	5	13	57.5	1.8	100
6060	60	60	60	47.5	8	20	5	13	57.5	2.0	120
8060	80	60	80	47.5	8	20	5	13	57.5	2.0	180
*10060	100	60	100	47.5	8	20	5	13	57.5	2.0	240
11060	110	60	110	47.5	8	20	5	13	57.5	2.0	250
12060	120	60	120	47.5	8	20	5	13	57.5	2.0	260
2565	25	65	25	53.5	8	20	5	13	63.5	1.6	40
3365	33	65	33	53.5	8	20	5	13	63.5	1.6	60
4565	45	65	45	53.5	8	20	5	13	63.5	1.6	110
6565	65	65	65	53.5	8	20	5	13	63.5	1.6	180
*5075	50	75	50	63.5	8	20	5	13	73.5	1.8	180
*7575	75	75	75	63.5	8	20	5	13	73.5	1.8	200
2580	25	80	25	68.5	8	20	5	13	78.5	1.8	100
3080	30	80	30	68.5	8	20	5	13	78.5	2.0	110
3580	35	80	35	68.5	8	20	5	13	78.5	2.0	115
4080	40	80	40	68.5	8	20	5	13	78.5	1.8	120
4580	45	80	45	68.5	8	20	5	13	78.5	2.0	125
5080	50	80	50	68.5	8	20	5	13	78.5	1.8	130
5580	55	80	55	68.5	8	20	5	13	78.5	2.0	160
6080	60	80	60	68.5	8	20	5	13	78.5	2.0	180
8080	80	80	80	68.5	8	20	5	13	78.5	2.0	240
10080	100	80	100	68.5	8	20	5	13	78.5	2.0	260
12080	120	80	120	68.5	8	20	5	13	78.5	2.0	270
14080	140	80	140	68.5	8	20	5	13	78.5	2.0	280
40100	40	100	40	88.5	8	20	5	13	98.5	2.0	130
50100	50	100	50	88.5	8	20	5	13	98.5	2.0	160
60100	60	100	60	88.5	8	20	5	13	98.5	2.0	240
80100	80	100	80	88.5	8	20	5	13	98.5	2.0	260
100100	100	100	100	88.5	8	20	5	13	98.5	2.2	280